
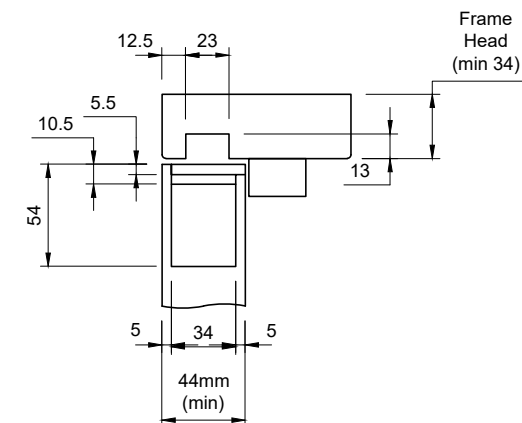


All Dimensions Are  
In mm Unless Stated

Notes:

- Hardwood Or Softwood Frame Minimum Density 510kg/m<sup>3</sup> & Minimum Section 73mm Wide x 34mm Thick
- Use Manufacturer's Intumescent Kit Only
- All Rebates In Door & Frame Head To Be Fitted With Intumescent Material As Per Manufacturer's Instructions See CF242
- **Dimensions Include Allowances For Intumescent Material**

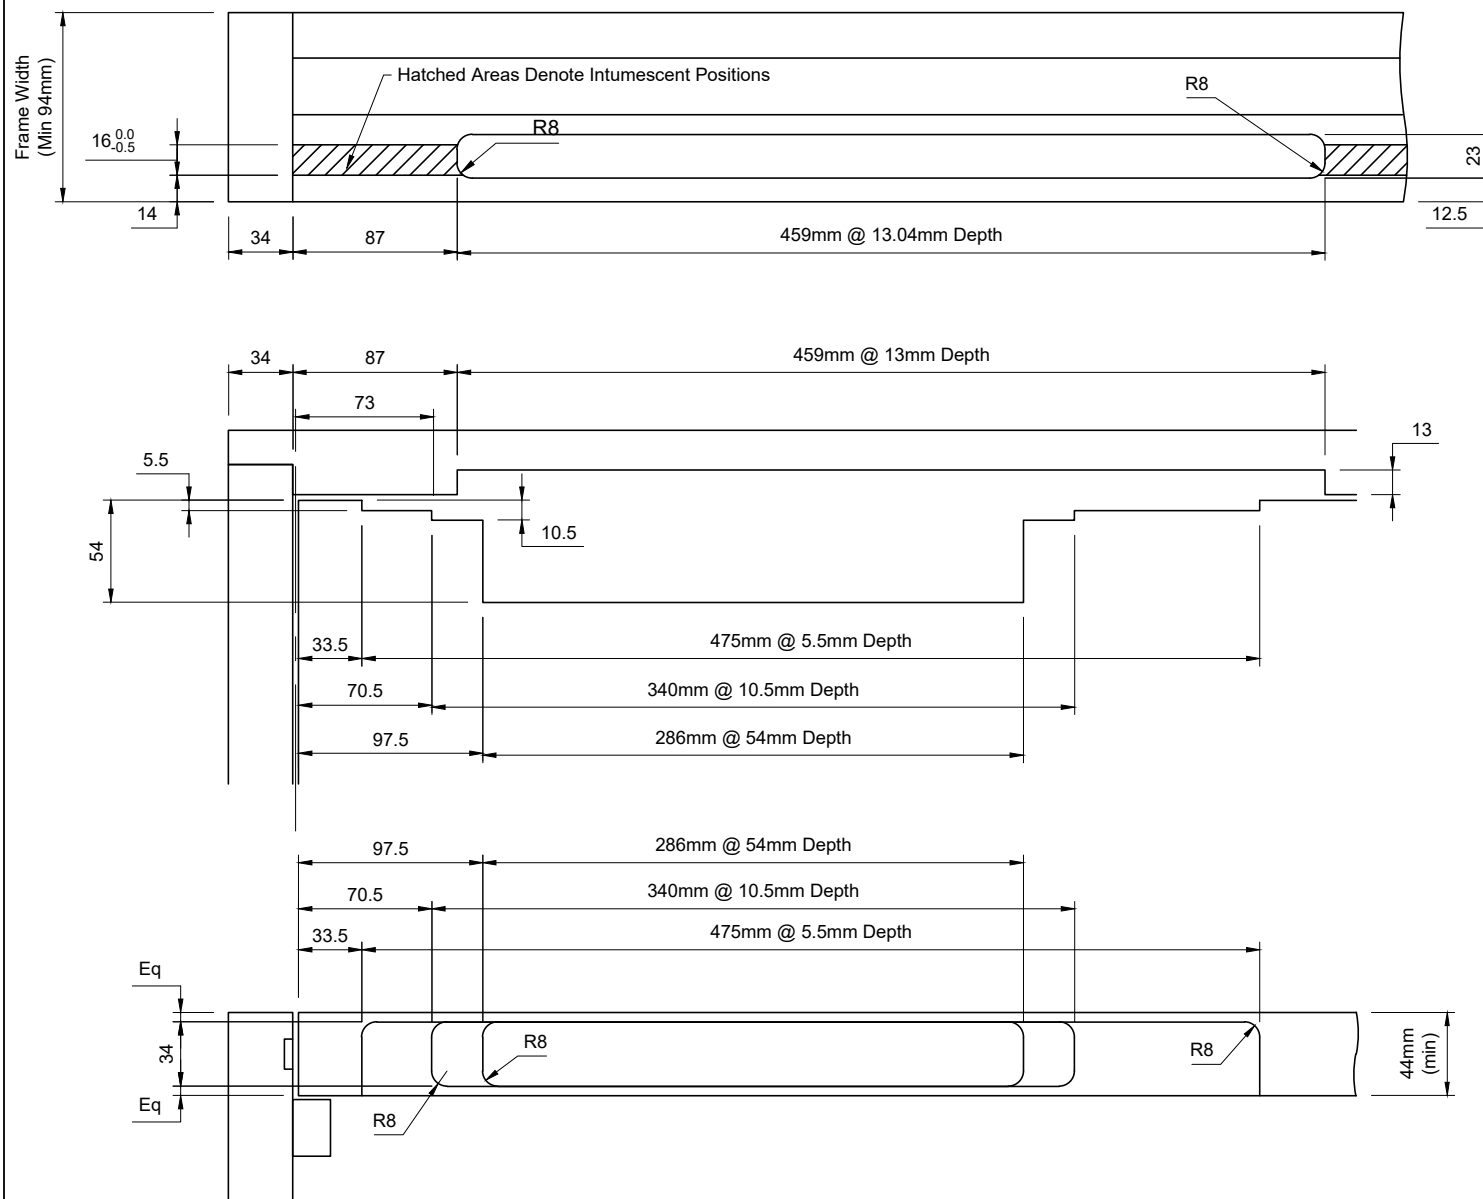

Do Not Scale.

If In Doubt Ask!

Description: **Concealed Closer Machining - CF5228 - FD30 - Geze Boxer 2-4**

Drawn By: <b>P. Brash</b>	Approved: <b>Approved</b>	Revision: <b>Groove in frame head increased 1mm to 23mm</b>	Date: <b>09/08/2021</b>	Drawing No:
Size: <b>See Above</b>	Tolerance: <b>+/- 0.5mm</b>		Fire Rating:	<b>DP19706</b>
Job No: <b>N/A</b>	© Doorpac Ltd		<b>FD30S</b>	Rev01