



Glazing Must Be To This Drawing - Do NOT Mix
Glazing Systems Even If They Appear The Same

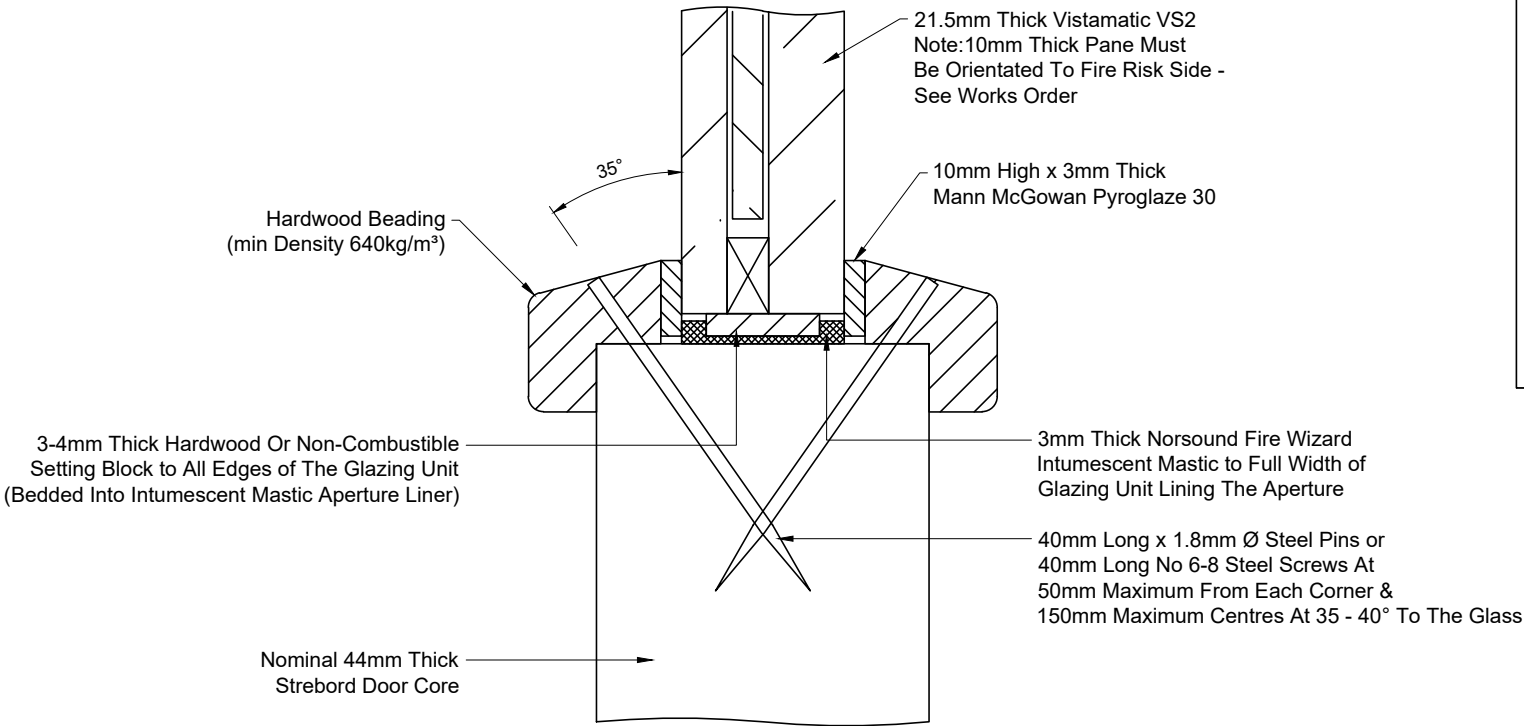

Bead Profile - See DP19499 Rev01



Quality Standard Of Glazed Aperture To Work Instruction - WI_21


Only Employees With A Signed Training Record For This Glazing System To Use This Glazing System

Approved Glass - 21.5mm (Nom) Vistamatic VS2 Vision Panel							
Glass Type	Material Specification For Glass	Beading Drawing	Material Specification For Beading	Maximum Single Pane Area (m²)	Maximum Total Glazed Area (m²)		
Vistamatic VS2	MS_006	DP19499 Rev01	MS_007	0.6	1.9	Machined Aperture 8mm Larger Than Glass	Finished Aperture 8mm Larger Than Glass

Do Not Scale.

If In Doubt Ask!

Description: Glazing System - Vistamatic VS2 (21.5mm Unit Thickness) - Bolection Bead - See Works Order For Turn Position - 44mm Strebord- FD30

Drawn By: P. Brash	Approved: Approved	Date: 18/02/2025	Drawing No: DP19498 REV 01	 Unit 6, Ranskill Court, Sheffield, S9 5FZ
Size: See Above	Tolerance: +/- 0.5mm	Fire Rating: FD30S		
Cert No: Global Assessment Chilt/A02066 Rev0	© Doorpac Ltd			