


Approved Glass - See CF284			
Glass Type	Maximum Height (mm)	Maximum Width (mm)	Maximum Area (m ²)
7mm Pyroguard	2125 (At 301 Wide)	610 (At 1049 High)	0.64
7mm Pyrobelite	2300 (At 747 Wide)	890 (At 1932 High)	1.72

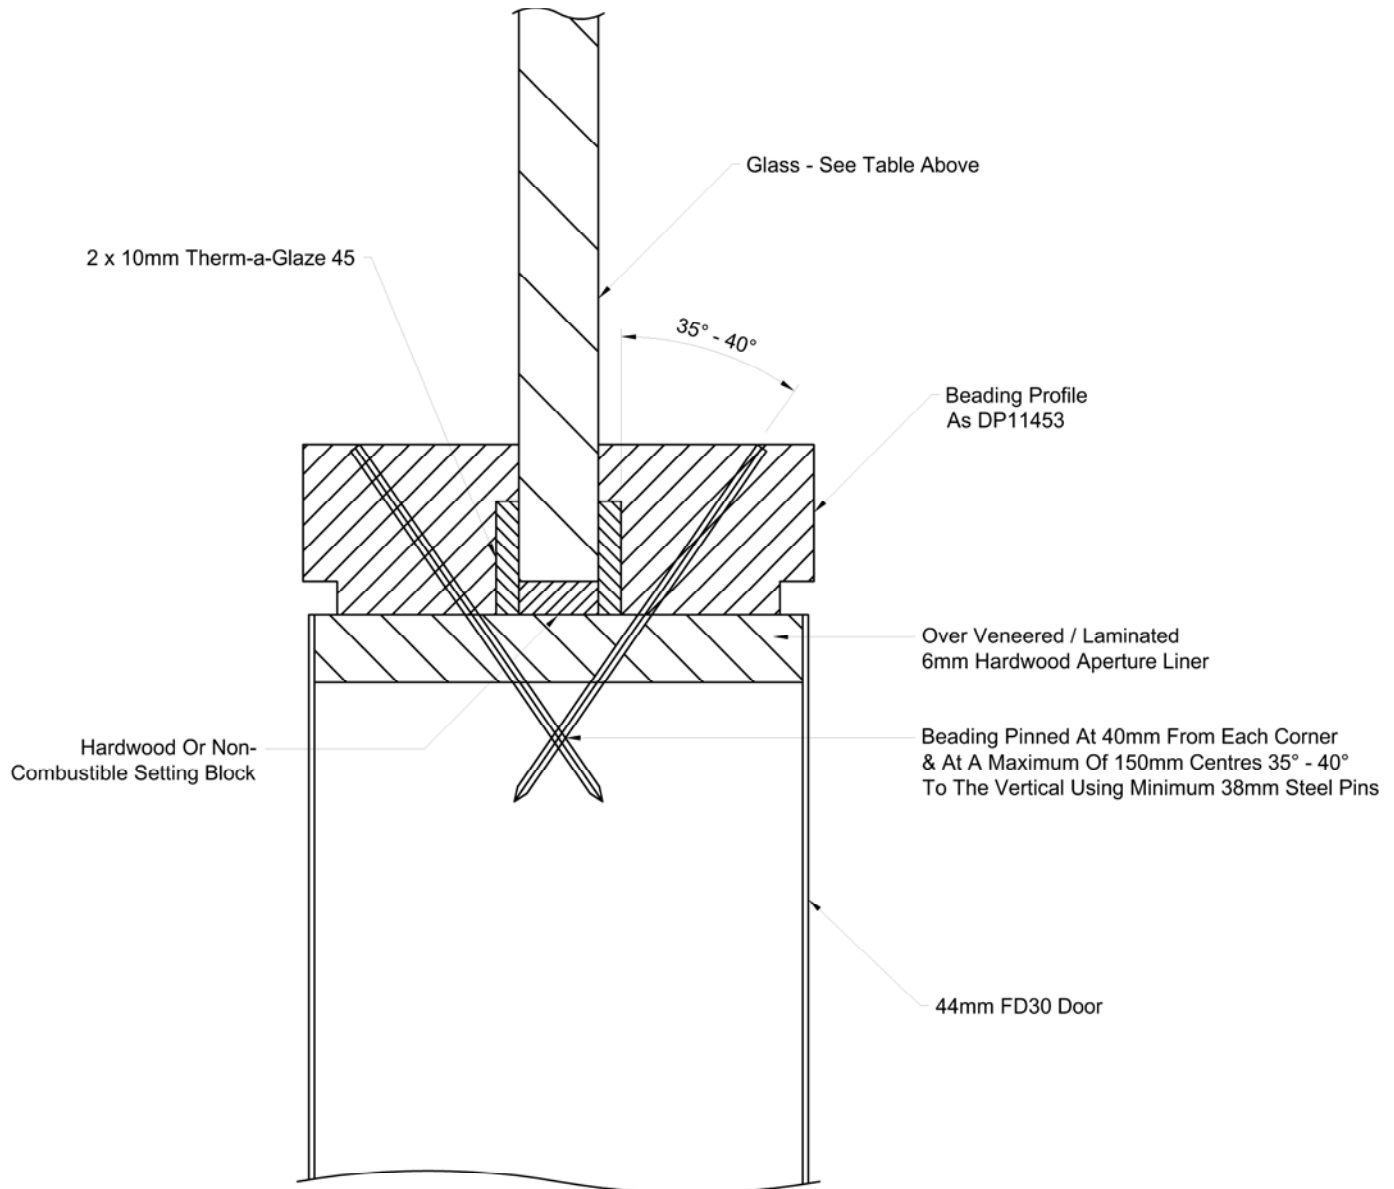

Notes:-

Only Employees With A Signed Training Record For This Glazing System To Use This Glazing System

Glazing Must Be To This Drawing - Do Not Mix Glazing Systems Even If They Appear The Same

Quality Standard Of The Glazed Aperture To Work Instruction WI-021

Material Specification For Glass - MS_006


Material Specification For Beading - MS-007

Machined Aperture 17mm Larger Than Glass Size

Lined Aperture 5mm Larger Than Glass Size

Do Not Scale.

If In Doubt Ask!

Job No:	Description: Therm-a-Glaze 45, FD30 Glazing System - Flush Bead		
© Doorpac Limited	SIZE: As Above	Drawing No: DP13859	
	Unit 6, Ranskill Court	Tolerance: +/- 0.5mm	Revision: 03
	Sheffield,	Drawn By: P. Brash	Drawn Date: 16/04/2020
	S9 5FZ.	Approved: M. Jenkinson	Fire Rating: FD30