


Glazing Must Be To This Drawing - Do NOT Mix Glazing Systems Even If They Appear The Same

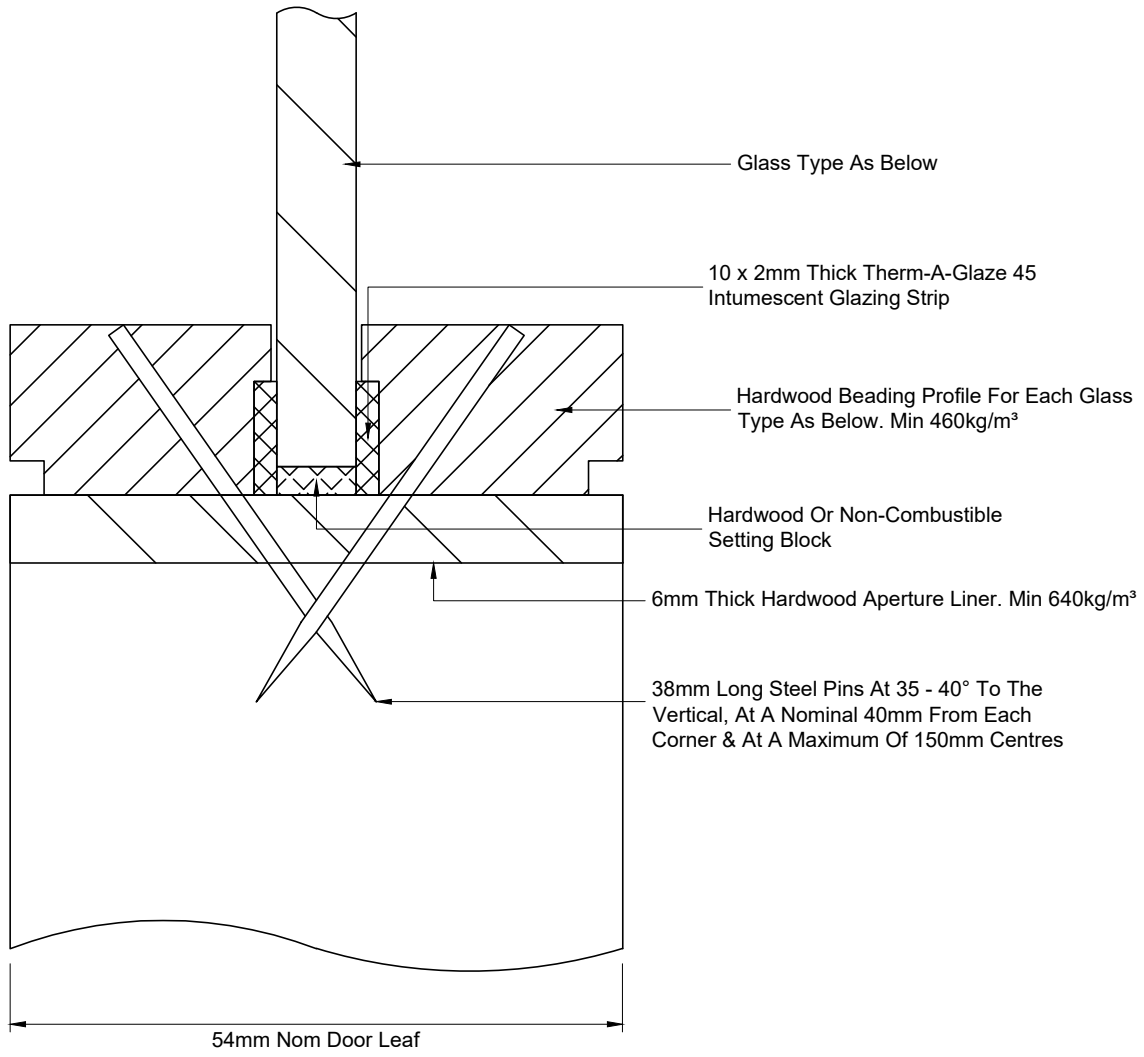

Quality Standard Of Glazed Aperture To Work Instruction - WI_21
 Only Employees With A Signed Training Record For This Glazing System To Use This Glazing System


Approved Glass

Glass Type	Glass Certificate	Material Specification For Glass	Beading Drawing	Material Specification For Beading	Maximum Width (mm)	Maximum Height (mm)	Maximum Area (m ²)	Machined Aperture Width 17mm Larger & Height 19mm Larger Than Glass	Lined Aperture Width 5mm Larger & Height 7mm Larger Than Glass
7mm Pyroguard	CF284	MS_006	DP24915	MS_007	610(W) @1049(H)	2125(H) @301(W)	0.64		
7mm Pyrobelite	CF284	MS_006	DP24915	MS_007	890(W) @1932(H)	2300 (H) @747 (W)	1.72		

Do Not Scale. If In Doubt Ask!

Description: **Glazing System - FD30 - 7mm Pyroguard & Pyrobelite 7 - 54mm Door - Flush Bead**

© Doorpac Ltd

Drawn By: P. Brash	Approved: Approved	Date: 10/04/2026	Cert / FoA Ref: CF284	Drawing No: DP24914 Rev 00	 Unit 6, Ranskill Court, Sheffield, S9 5FZ
Size: As Above	Rev:	Fire Rating: FD30S			
Job No:	Tolerance: ±0.25mm				