


Glazing Must Be To This Drawing - Do NOT Mix  
Glazing Systems Even If They Appear The Same

All Dimensions Are  
In mm Unless Stated

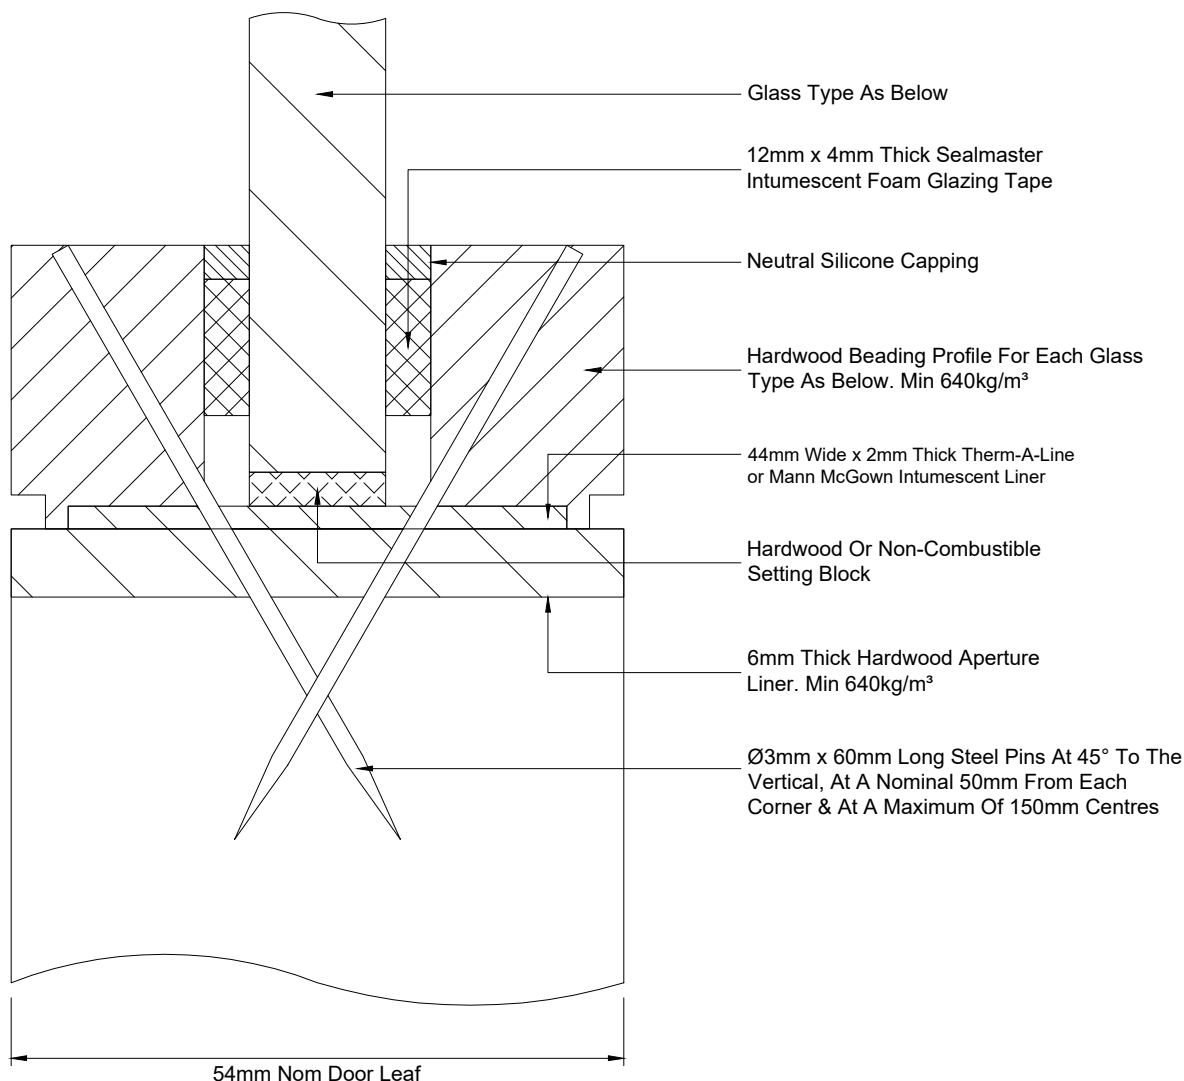

Quality Standard Of Glazed Aperture To Work Instruction - WI\_21

Only Employees With A Signed Training Record For This Glazing System To Use This Glazing System

### Approved Glass


Glass Type	Glass Certificate	Material Specification For Glass	Beading Drawing	Material Specification For Beading	Maximum Width (mm)	Maximum Height (mm)	Maximum Area (m <sup>2</sup> )	Machined Aperture Width 21mm Larger & Height 23mm Larger Than Glass	Lined Aperture Width 5mm Larger & Height 7mm Larger Than Glass
Pyrobelite 12	CF377	MS_006	DP15763 Rev01	MS_007	604(W) @1830(H)	1830(H) @604(W)	1.12		

Do Not Scale.

If In Doubt Ask!

Description: **Glazing System - FD60 - 12mm Pyrobelite Glass - 54mm Strebord Door - Flush Bead**

© Doorpac Ltd

Drawn By: <b>O BOOY</b>		Approved: <b>Approved</b>	Date: <b>13/01/2026</b>	Cert / FoA Ref:  <b>CF377</b>	Drawing No:  <b>DP15760</b>  <b>Rev 07</b>	 Unit 6, Ranskill Court, Sheffield, S9 5FZ
Size: <b>As Above</b>		Rev:	Fire Rating:  <b>FD60S</b>			
Job No:	Tolerance: <b>±0.25mm</b>					