


**Glazing Must Be To This Drawing - Do NOT Mix
Glazing Systems Even If They Appear The Same**

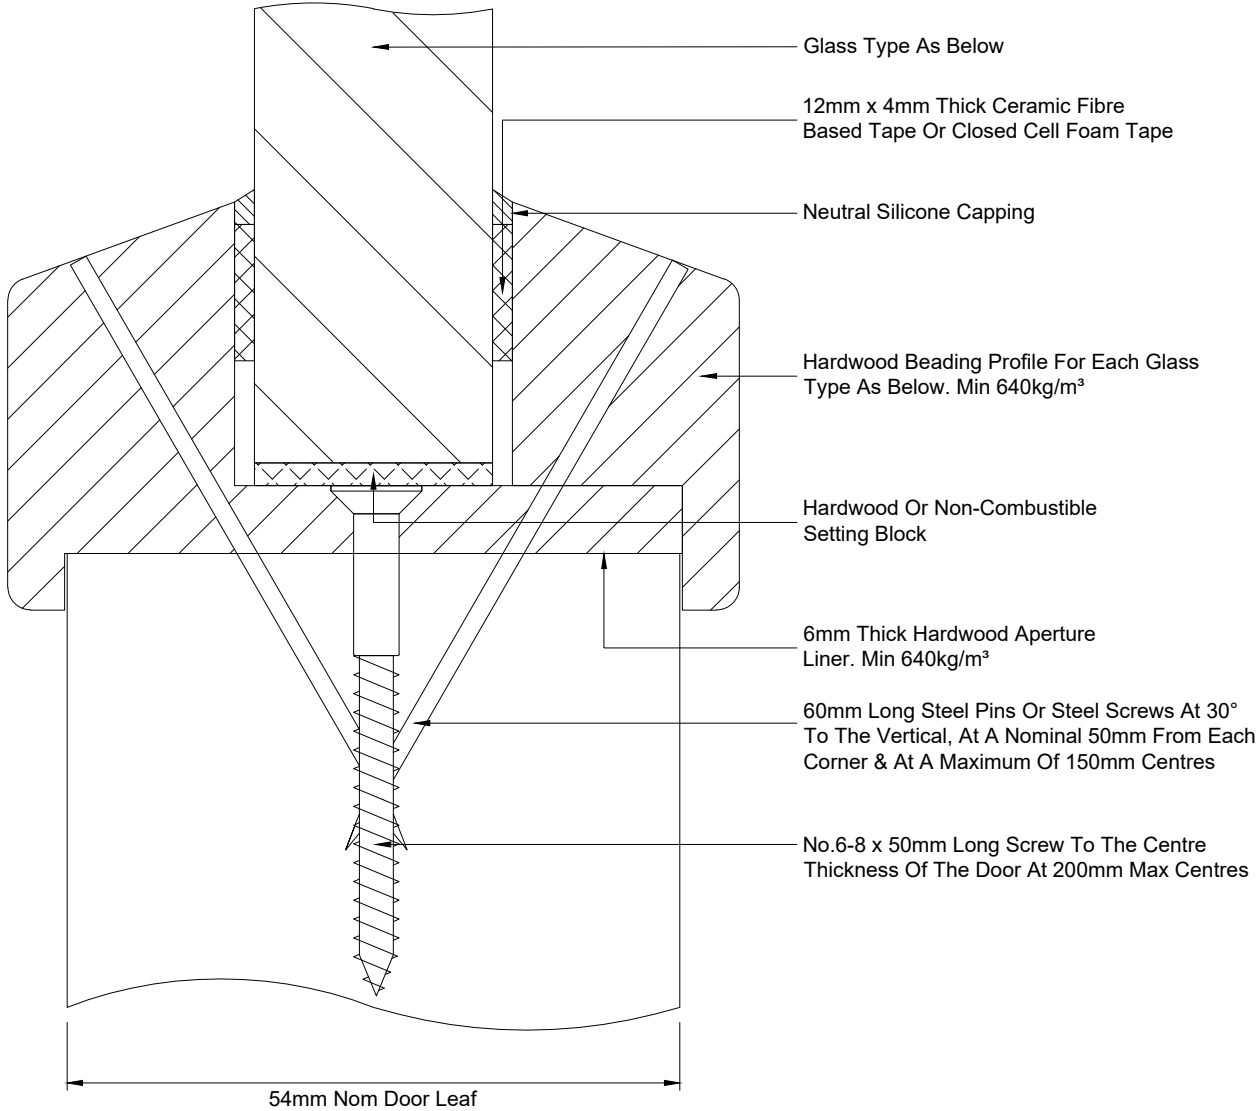

Quality Standard Of Glazed Aperture To Work Instruction - WI_21

Only Employees With A Signed Training Record For This Glazing System To Use This Glazing System

Approved Glass


Glass Type	Glass Certificate	Material Specification For Glass	Beading Drawing	Material Specification For Beading	Maximum Width (mm)	Maximum Height (mm)	Maximum Area (m ²)	Machined Aperture Width 17mm Larger & Height 19mm Larger Than Glass	Lined Aperture Width 5mm Larger & Height 7mm Larger Than Glass
Pyrobelite 16EG	CF377	MS_006	DP24686	MS_007	604(W) @1830(H)	1830(H) @604(W)	1.12		
Pyrobelite 16EG (PAS24)	CF377	MS_006	DP24686	MS_007	150	1480	0.22		

Do Not Scale.

If In Doubt Ask!

Description: **Glazing System - FD60 - Pyrobel 16EG Glass - 54mm Strebord PAS24 Door - Bolection Security Bead**

© Doorpac Ltd

Drawn By: O BOOY	Approved: Approved	Date: 13/01/2026	Cert / FoA Ref: CF377	Drawing No: DP15983 Rev 02	 Unit 6, Ranskill Court, Sheffield, S9 5FZ
Size: As Above	Rev:	Fire Rating: FD60S			
Job No:	Tolerance: ±0.25mm				