


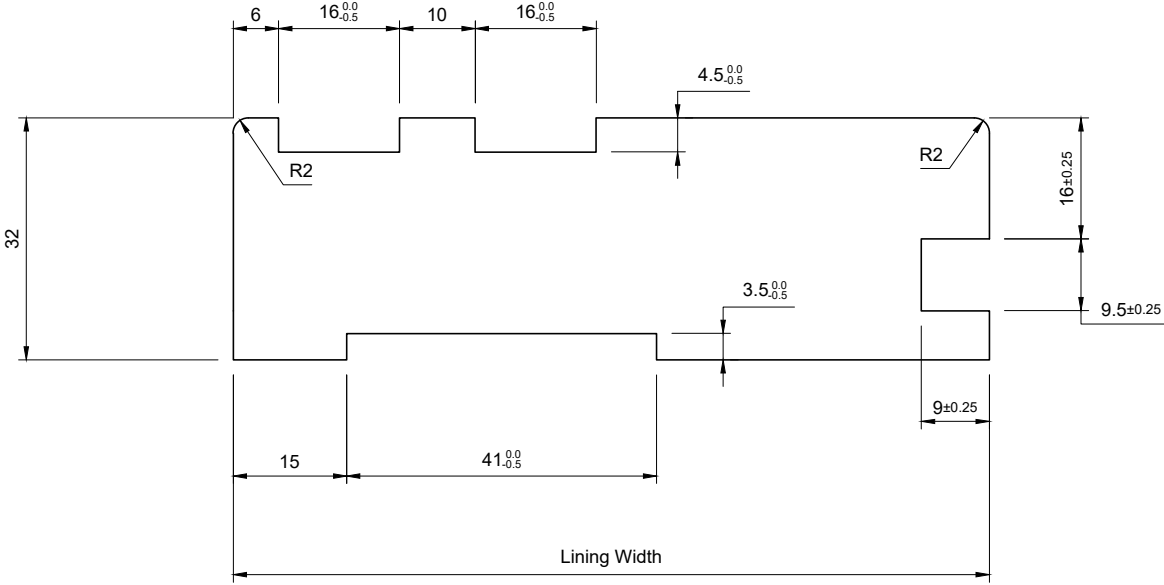

Notes:

Material: Hardwood (Excluding Ash, Beech & Iroko)
Min Density: 640kg/m³

Do Not Scale. If In Doubt Ask!

Description: **Machining Profile - Quick2Seal+ 32mm Timber - Q2F To Push - FD60**

Drawn By: P. Brash	Approved: Approved	Revision:	Cert / FoA Ref: CAF196	Date: 21/08/2025	Drawing No: DP24138	 Unit 6, Ranskill Court, Sheffield, S9 5FZ
Size: See Above	Tolerance: +/- 0.25mm			Fire Rating:	Rev00	
Job No: N/A	© Doorpac Ltd			FD60S		