
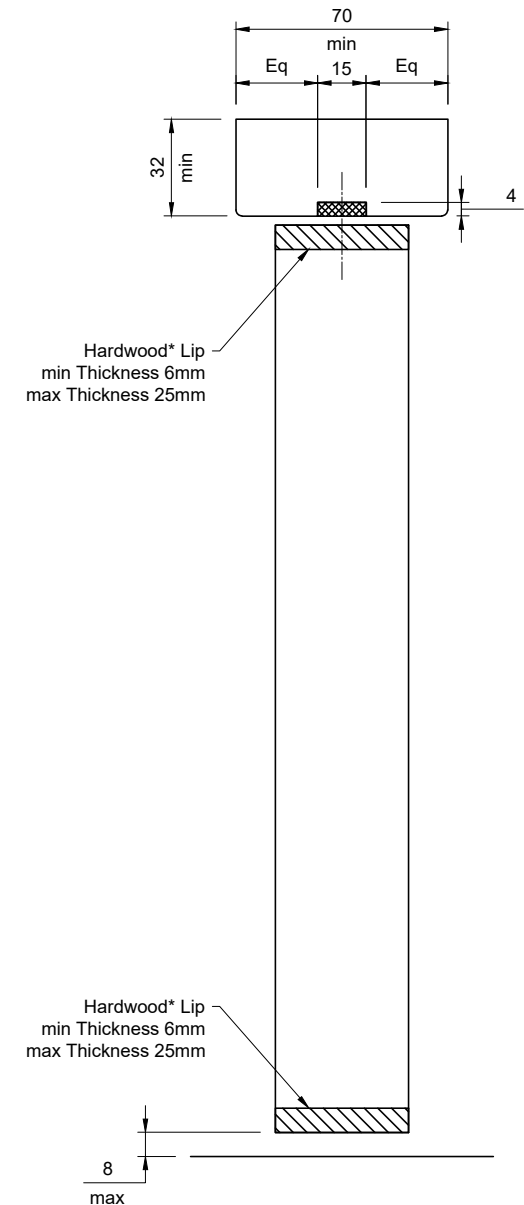


All Dimensions Are
In mm Unless Stated

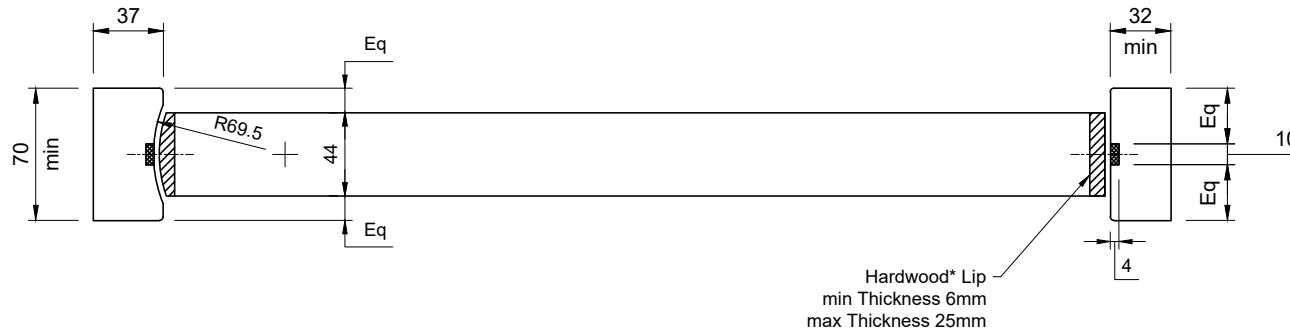

Notes:

Max Leaf Height: 3264mm @ 921mm Wide

Max Leaf Width: 1171mm @ 2764mm High

Door Leaf Is To Be Positioned Centrally Within The Width Of The Frame

* - Hardwood Lippings - Min Density 650kg/m³ (Excluding Ash, Beech & Iroko)

Frame Material - Softwood or Hardwood min Density 510kg/m³

Minimum Frame Dimensions: 70mm Wide x 32mm Thick

Hanging Jambs Machined With 52mm Wide x 5mm Deep Scallop - See DP24073


Frame Intumescent Seals - Lorient Polyproducts Ltd 15mm Wide x 4mm Thick
LP1504 To Frame head & 10mm Wide x 4mm Thick LP1004 To Frame Jambs

For More Information See Technical Datasheet

Do Not Scale.

If In Doubt Ask!

Description: **CF435 & CF534 - FD30 Double Acting Single Door Assembly - Overview**

Drawn By: P. Brash	Approved: Approved	Revision:	Cert / FoA Ref: CF435 CF534	Date: 18/08/2025	Drawing No: DP24072 Rev 00	 Unit 6, Ranskill Court, Sheffield,
Size: See Above	Tolerance: +/- 0.25mm			Fire Rating:		
Job No: N/A	© Doorpac Ltd			FD30S		